
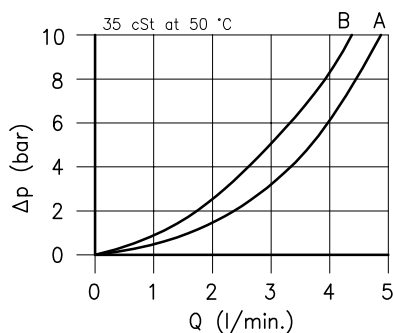


Technical features

04





A = 2 ↔ 1

B = 2 ↔ 3

Cavity	(For dimensions see catalogue 17.002)	S 28/3
Max. flow	(l/min.)	5
Max. pressure	(bar)	210
Response time	(ms)	30 - 60
It change in function of circuit, pressure, flow and fluid viscosity.		(Mean value)
Fluid viscosity range	(cSt)	2.8 - 380
Fluid temperature range	(°C)	-20 +80
Mass	(kg)	0.140
Hydraulic fluid; mineral oil HM and HV ISO 6074		
Recommended filtration; 19/15 ISO 4466 (25 μ absolutes)		
Standard seals in Polyurethane and Buna N		

Dimensions

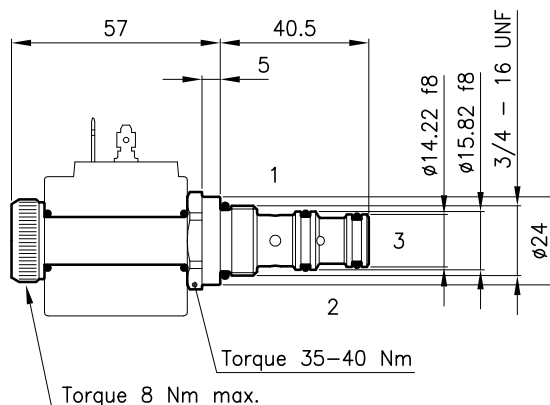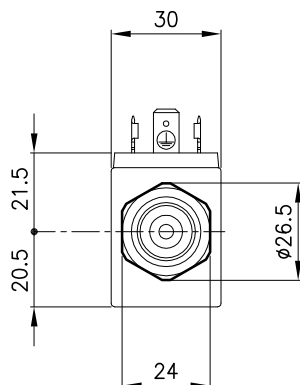

Ordering informations


ECD 28/3204

ECD 28/32.. = Valve type



Circuits

3204



Codes:

ECD 28/3204 25 011 130

External seals kit 90 620 118

ECD 28/32.. valves can be assembled on standard bodies 28-C3 series; for dimensions see catalogue 16.020

On the ECD 28 valves must be assembled the Coils B28 series; for dimensions, features and codes see catalogue 09.902.