

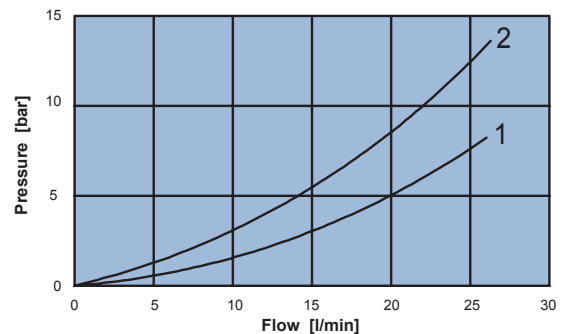
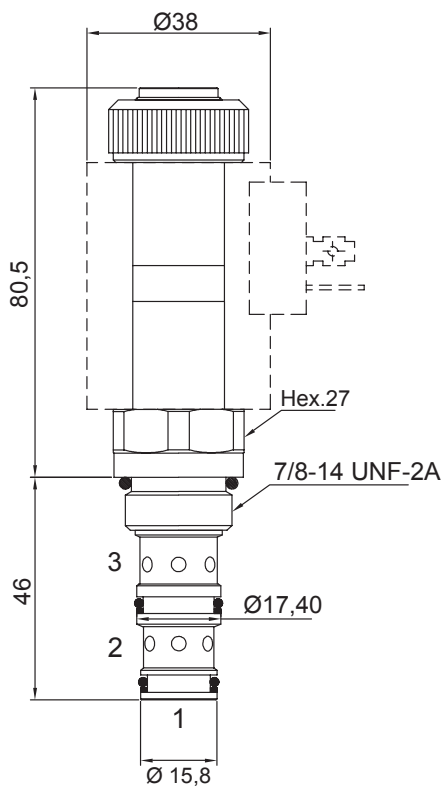


3 WAY 2 POSITION ELECTRIC SPOOL VALVE, DIRECT ACTING

- Flow **20 l/min**
- Max working pressure..... **250 bar**
- Leakage **100 cc/min**
- Seals **NBR and PTFE**
- Cartridge tightening torque..... **40 Nm**
- Ring nut tightening torque **5 Nm**
- Weight (with coil)..... **0,56 Kg**
- Cavity **C330000** page 220
- Body..... **171312** page 192
- Coil (to be ordered separately) **09801** page 181



1 = Pressure drop from 2 in 1
2 = Pressure drop from 3 in 2

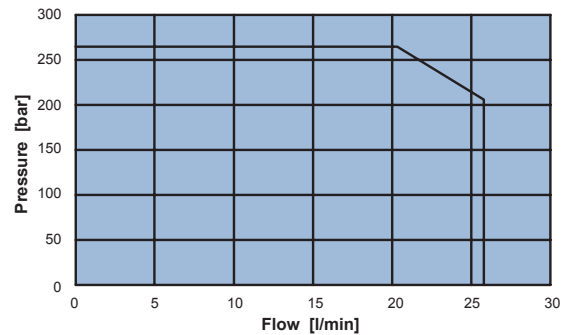

Application limits from 2 in 1 and 2 in 3

Ordering code

0 4 0 3 2 0 0 0 0

