




3 WAY 2 POSITION ELECTRIC SPOOL VALVE, DIRECT ACTING

- Flow **50 l/min**
- Max working pressure in 1:2:3 **250 bar**
- Leakage **150 cc/min**
- Seals **NBR and PTFE**
- Cartridge tightening torque..... **50 Nm**
- Ring nut tightening torque **5 Nm**
- Weight (with coil)..... **0,70 Kg**
- Cavity **C340000** page 222
- Body..... **171412** page 197
- Coil (to be ordered separately) **09800** page 180




Note: proportional coil 09800 applied to provide the operating needed power (ED 50%).

For ED 100% contact NEM customer care service.

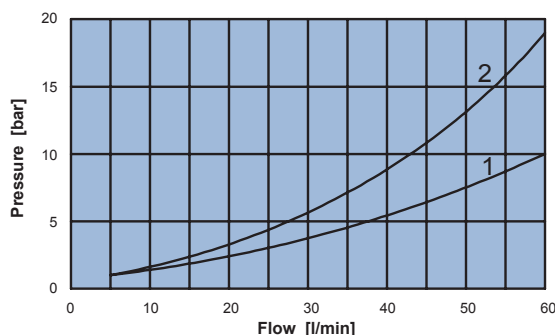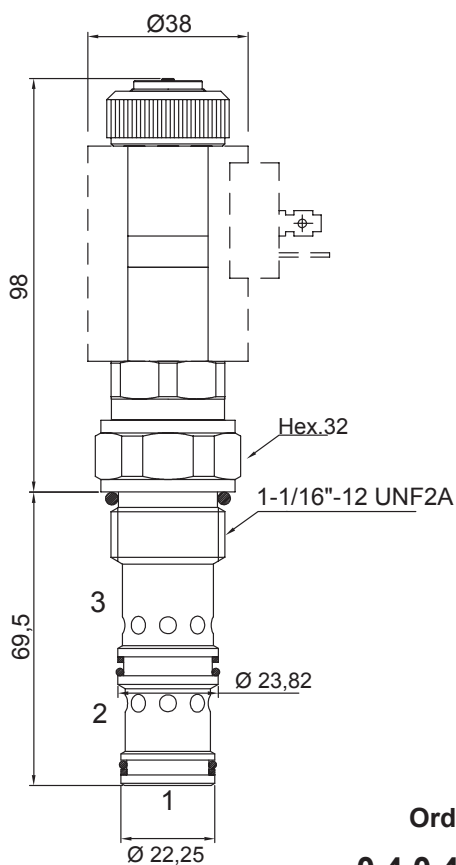

1 = Pressure drop from 2 in 1
2 = Pressure drop from 3 in 2

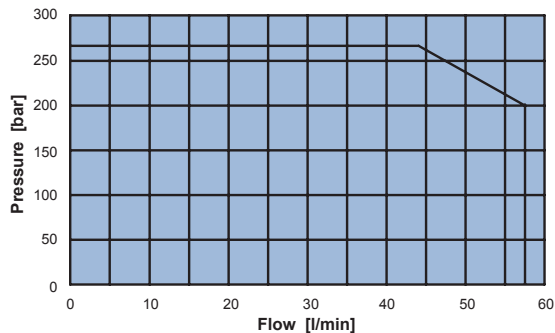

Application limits from 2 in 1 and 2 in 3

Ordering code

0 4 0 4 2 0 0 0 0

