




SUB PLATE TYPE EAS338PLX...
GRUNDPLATTE TYP EAS338PLX...

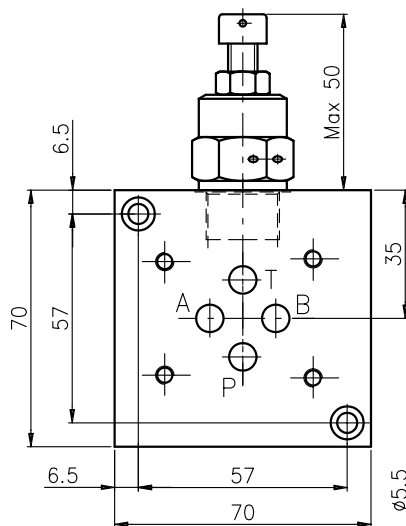

Sub plate, with ports A-B on side, P-T on rear, 3/8"G.
 With relief valve (RV). Weight = 0.6 Kg
 Max operating pressure: 210 bar
 Material: aluminium 2011 (FC1) anodized.

Grundplatte, A-B seitlich, P-T ruckseitig, 3/8"G.
 Mit Druckbegrenzungsventil (DBV). Gewicht = 0.6 Kg
 Max Betriebsdruck: 210 bar
 Werkstoff: aluminium 2011 (AlCuBiPb) eloxiert.

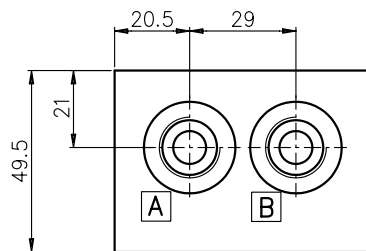

Hydraulic symbol
 symbol

Ordering code:
 Bestell-Code:

EUROFLUID
 Aluminium sub plate =
 Grundplatte aluminium

CETOP 3 = 3

3/8"G = 38

rear/side ports = PL
 seitlich/ruckseitige Anschluessen

EAS 3 38 PL X * F

performance
 betriebseigenschaften

F = Setting by key
 Einstellung Schlussverstellung

= Spring type / Feder typ

1 = 25-70 bar


2 = 35-170 bar

3 = 70-315 bar


X = with RV / mit RV

Set of 10 pcs.
 Satz von 10 Stk.

Valve seat VM30
 Sitzventil VM30

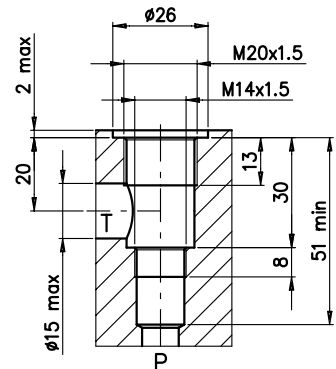

Kit close plug



Ordering code:
 Bestell-Code:

ET VM30

