




REGOLAZIONE
ADJUSTMENT

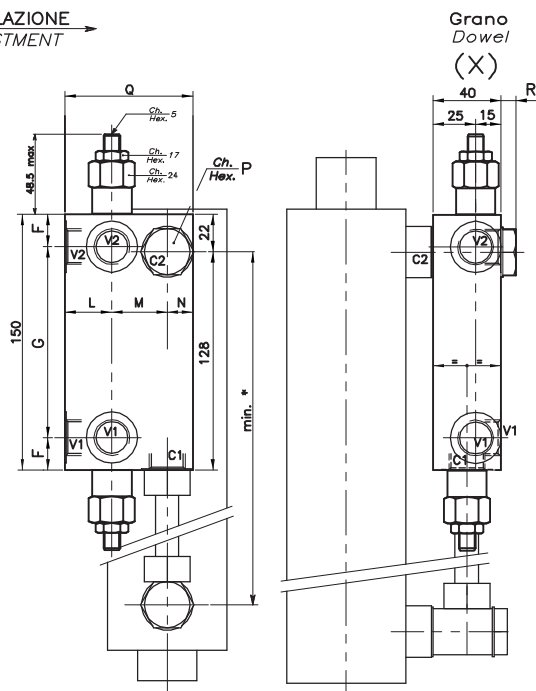

Piombata
Sealed
(K)



ESEMPIO TIPICO DI CIRCUITO TYPICAL CIRCUIT EXAMPLE

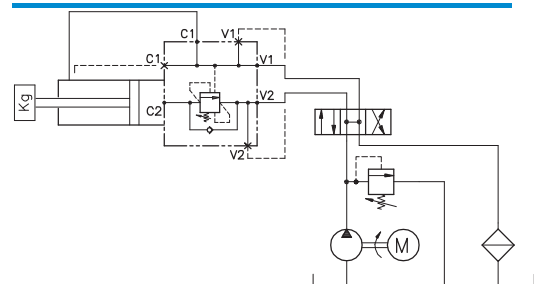

DIMENSIONI DIMENSIONS

Campo taratura Setting range	F	G	L	M	N	P	Q	R	Attacchi Port size V1-C1 V2-C2 GAS (BSPP)	Coppia serr. Bullone Tightening torque for Bolt NM	Portata max Max flow-rate l/min - GPM
288	21	108	25	27	13	22	65	9	3/8"	63÷71	40-10
289	19	112	27	32	16	27	72	10	1/2"	75÷85	60-15

CODICE DI ORDINAZIONE HOW TO ORDER

N01 . 288 . 0 X 0 . A

Campo taratura / Setting range

288

289

Campo taratura 60÷350 bar (molla colore giallo)
Setting range 60÷350 bar (yellow spring)

Taratura standard (Q=5 l/1')
Std. bar setting Q=5 l/1')

250 bar

Incr. press. - bar giro/vite
Pressure rise - turn of screw
(90)

Rapporto
di pilotaggio
Pilot ratios

O 4.25 : 1
D 8 : 1

Regolazione
Adjustment

X Grano - Dowel
K Piombata - Sealed

Collettore
Body

A Acciaio
zincato
Zinc plated
steel

288

Collettore possibile in AL togliendo "A"
Available aluminium body without "A"