
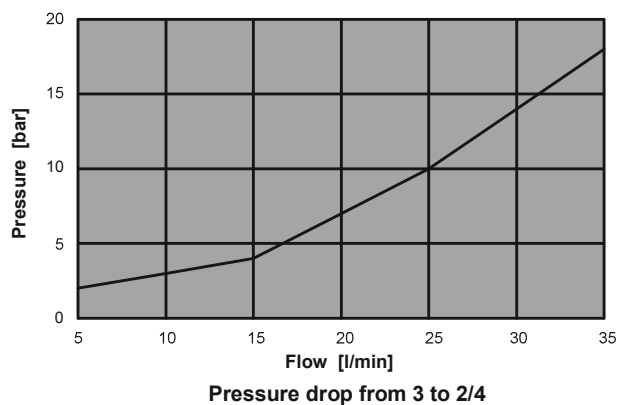
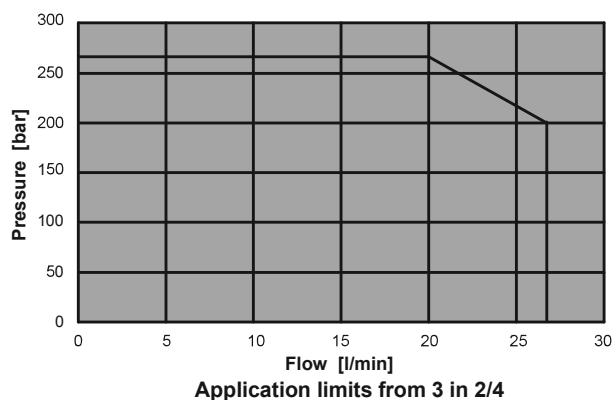
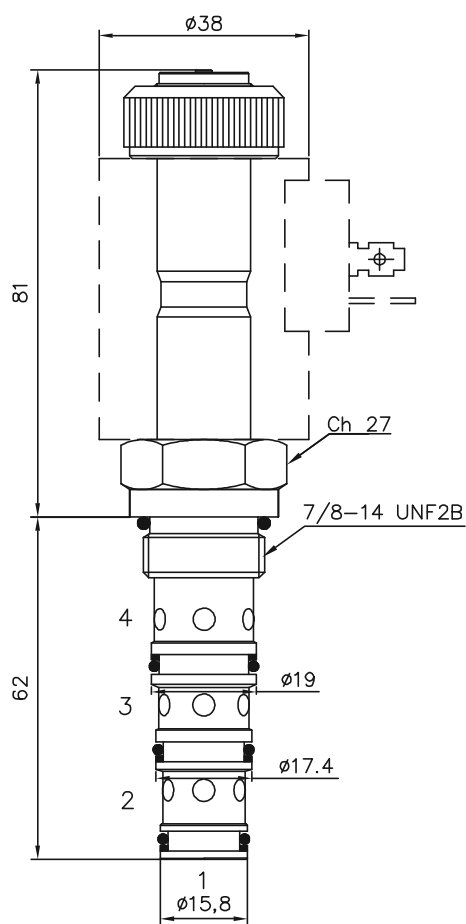



## 4 WAY 2 POSITION ELECTRIC SPOOL VALVE, DIRECT ACTING

- Flow ..... **25 l/min**
- Max working pressure ..... **250 bar**
- Leakage ..... **100 cc/min**
- Seals ..... **NBR and PTFE**
- Cartridge tightening torque ..... **40 Nm**
- Ring nut tightening torque ..... **5 Nm**
- Weight (with coil) ..... **0,56 Kg**
- Cavity ..... **C430000** page 226
- Body ..... **171322** page 195
- Coil (to be ordered separately) ..... **09801** page 181



### Ordering code

0 4 1 3 4 0 0 0 0

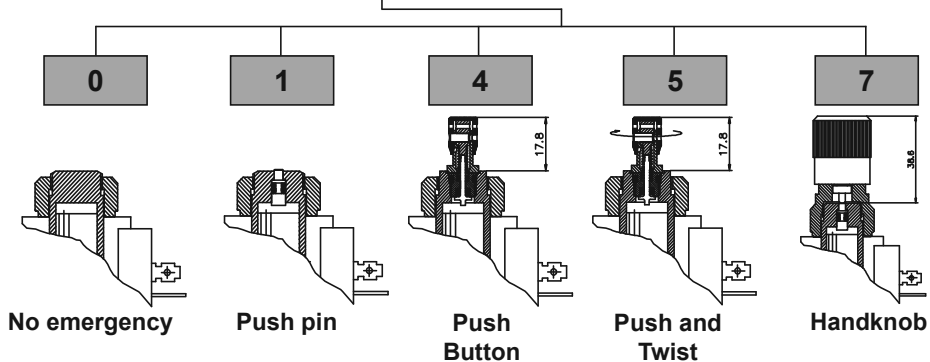


## COIL - TUBE Ø 19


24 W

- Wire insulation class. . . . . H (>185°C)
- ED. . . . . 100%
- Coil power at 20° C. . . . . 24 W
- Ambient temperature . . . . . -20 +40° C
- Weight. . . . . 0,28 Kg



### ELECTRIC CIRCUITS





STANDARD





WITH DIODE  
(BI-DIRECTIONAL)

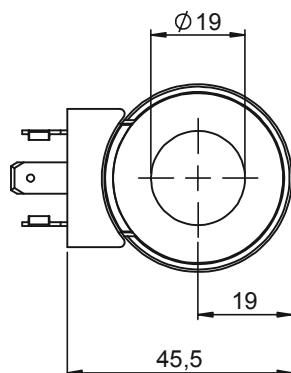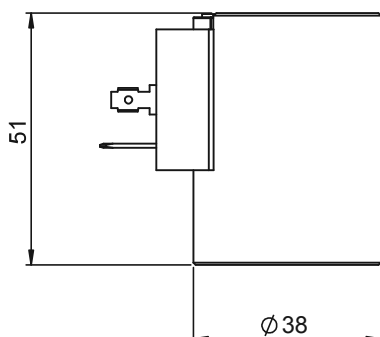

### AMP - JUNIOR



### DEUTSCH DT4




| CONNECTOR    | PROTECTION CLASS | COIL THERMAL INSULATION CLASS | VOLTAGE [V] | RESISTANCE [Ω] | CIRCUIT    | ORDERING CODE    |
|--------------|------------------|-------------------------------|-------------|----------------|------------|------------------|
| DIN 43650    | IP65*            | H                             | 12 V dc     | 6,8            | STANDARD   | <b>098011190</b> |
| DIN 43650    | IP65*            | H                             | 24 V dc     | 24             | STANDARD   | <b>098012190</b> |
| DIN 43650    | IP65*            | H                             | 26 V dc     | 27,1           | STANDARD   | <b>098012191</b> |
| DIN 43650    | IP65*            | H                             | 220 V Rac** | 1470           | STANDARD   | <b>098016190</b> |
| DEUTSCH DT 4 | IP67             | F                             | 12 V dc     | 6,8            | WITH DIODE | <b>098111190</b> |
| DEUTSCH DT 4 | IP67             | F                             | 24 V dc     | 24             | WITH DIODE | <b>098112190</b> |
| AMP - JUNIOR | IP65*            | F                             | 12 V dc     | 6,8            | WITH DIODE | <b>098211190</b> |
| AMP - JUNIOR | IP65*            | F                             | 24 V dc     | 24             | WITH DIODE | <b>098212190</b> |
| AMP - JUNIOR | IP65*            | H                             | 26 V dc     | 28,1           | WITH DIODE | <b>098212193</b> |

\* Protection index with standard connector

\*\* Rectifier not included - Power 25W

STANDARD BODY FOR LINE MOUNTING

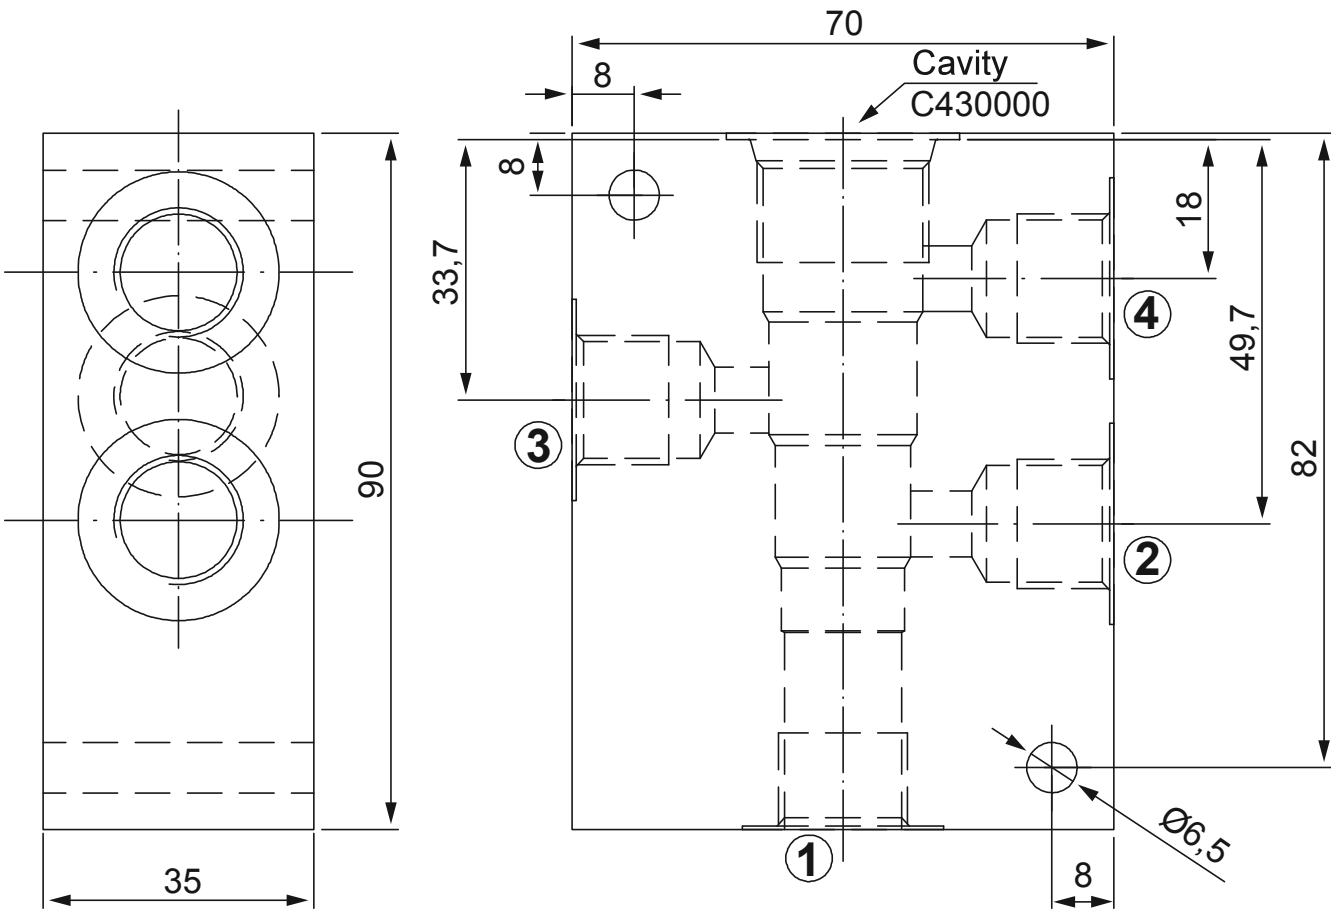

Ordering code

|                      |  |           |  |       |  |     |
|----------------------|--|-----------|--|-------|--|-----|
| 1 7 1 3 2 2          |  |           |  |       |  | 0 0 |
| PORTS<br>SIZE        |  | ALUMINIUM |  | STEEL |  |     |
| G3/8 = 2    G1/2 = 3 |  | 0         |  | 1     |  |     |