

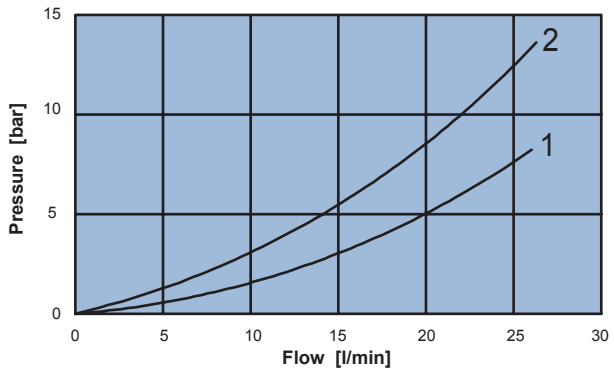
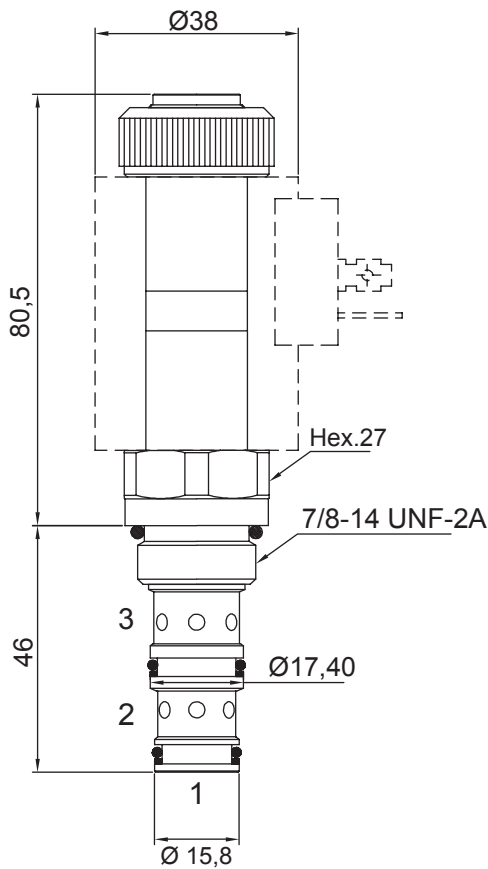


3 WAY 2 POSITION ELECTRIC SPOOL VALVE, DIRECT ACTING

- Flow20 l/min
- Max working pressure.....250 bar
- Leakage100 cc/min
- SealsNBR and PTFE
- Cartridge tightening torque.....40 Nm
- Ring nut tightening torque5 Nm
- Weight (with coil).....0,56 Kg
- CavityC330000 page 220
- Body.....171312 page 192
- Coil (to be ordered separately)09801 page 181



1 = Pressure drop from 2 in 1
2 = Pressure drop from 3 in 2

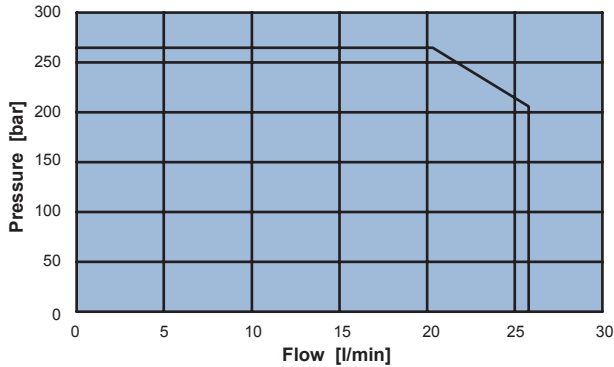

Application limits from 2 in 1 and 2 in 3

Ordering code

0 4 0 3 2 0 0 0 0

