
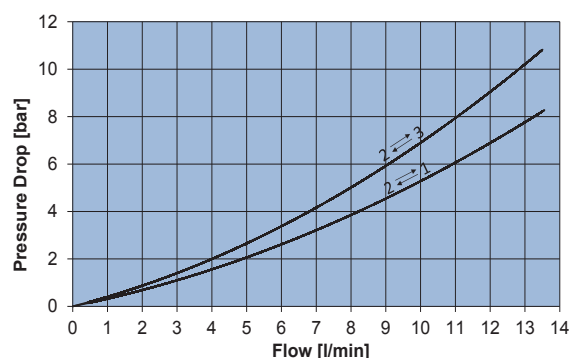
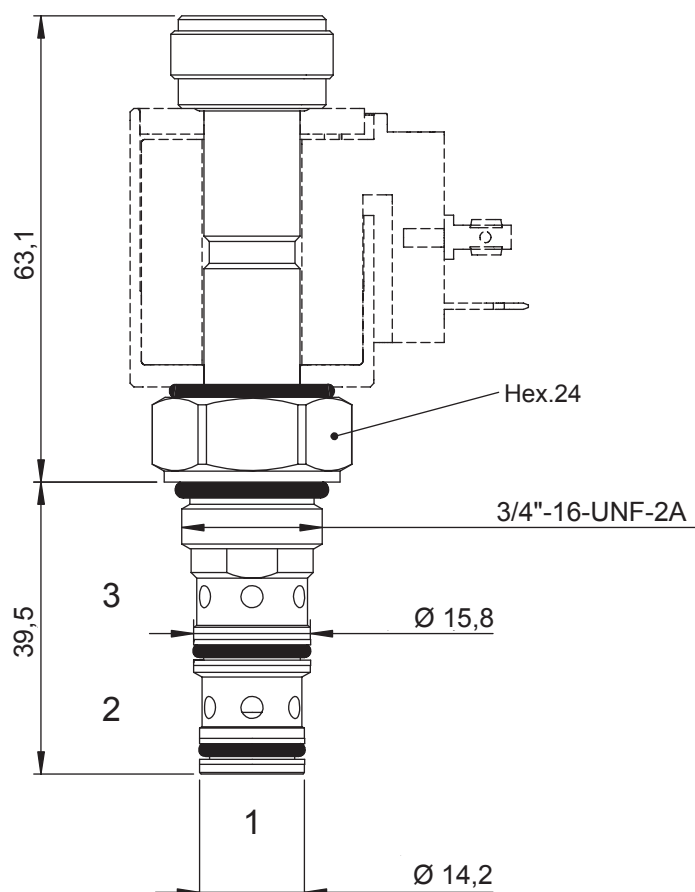


3 WAY 2 POSITION ELECTRIC SPOOL VALVE, DIRECT ACTING

- Max working flow (P in port 1) 7 l/min
- Max working flow (P in port 2) 13,5 l/min
- Max working flow (P in port 3) 5,5 l/min
- Max working pressure..... 250 bar
- Max Leakage at 250 bar..... 40 cc/min
- Seals NBR and PTFE
- Cartridge tightening torque 30 Nm
- Ring nut tightening torque 5 Nm
- Weight (with coil)..... 0,35 Kg
- Cavity C320000 page 218
- Body..... 171212 page 187
- Coil (to be ordered separately) 09400 page 179



Ordering code

0 4 0 2 2 0 0 0 0

