
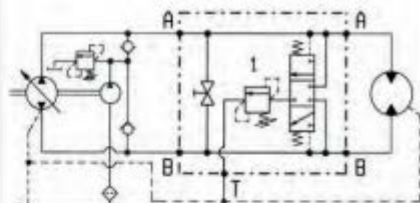



SCAMBIO PER TRASMISSIONI IDROSTATICHE FOR HYDROSTATIC TRANSMISSION PURGE

A-VSL-R

08.64.05.00 - Y

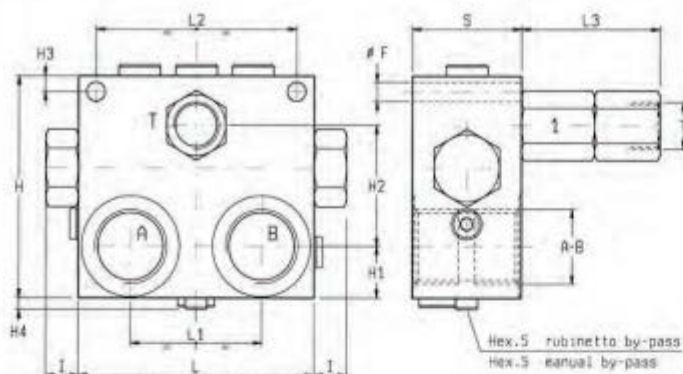


DATI TECNICI / TECHNICAL DATA

Pressione max. 350 bar
Max. working pressure

Portata di scambio vedi diagramma
Flow through shuttle valve and purge relief valve see performance graph

Collettore in acciaio
Steel body

50	65	92	60	108	15	12	7	56	24	100	8.5				1	4.00
66	65	82	50	100	15	12	8	34	34	100	8.5				3/4	3.70
S	L3	L2	L1	L	I	H4	H3	H2	H1	H	F				Y	Peso kg Weight kg

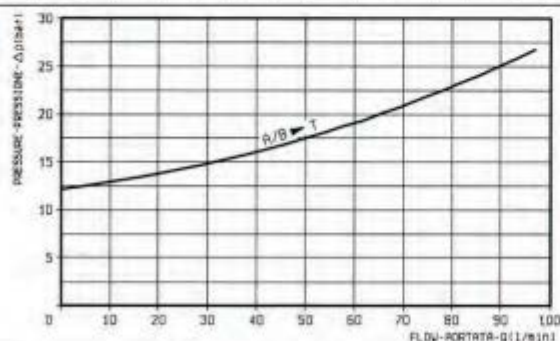

MOLLE (VALVOLA 1) / SPRINGS (VALVE 1)					
Campo taratura min - max bar Adj. press. range bar	Incremento press. bar / giro vite Press. increase bar / turn	Taratura standard bar Std. setting bar (crack, pressure)	Cod. ordinazione Ordering code	Colore Colour	
5-25	6	12	03.51.01.015		

Y	ATTACCHI / PORT SIZE	
	A-B	T
04	G 3/4	G 1/2
05	G 1	G 1/2